


Seatium



Thor Player Seat Technical Datasheet Player Bench , Referee and Paramedics Seat

- ✓ Vinyl used for upholstery (produced from %80 polyurethane , %20 polyester) is resistant to friction, fire and UV. Friction resistance : min. 40.000 cycles. Weight : : 550 gr/m²
- ✓ Three upholstery colors can be used in one seat.
- ✓ Seating and back units of the seats are manufactured from polyurethane material in aluminum molds designed in accordance with human anatomy, in compliance with 50 + - 10% density and Mvss 302 fire standards.
- ✓ Inside the seat and back pads, there is durable steel frame.
- ✓ Seats are fixed, there is no tip up mechanism.
- ✓ The foot unit of the seats are manufactured from 100 mm diameter and 2.5 mm tube, and the floor connection parts are made of at least 2 mm thick sheet metal, by giving form and strength.
- ✓ Seats have no armrests for security reasons.

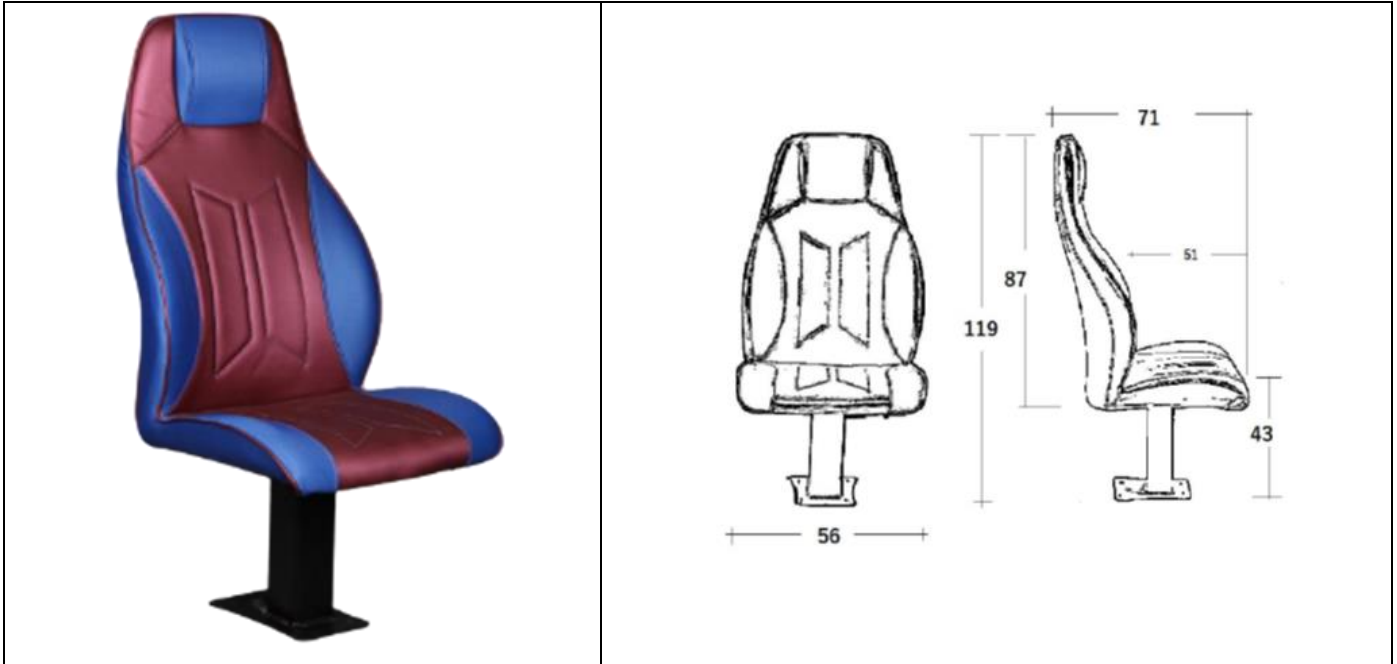